


## 6-Port Gigabit PoE Switch



[www.hrutech.com](http://www.hrutech.com)

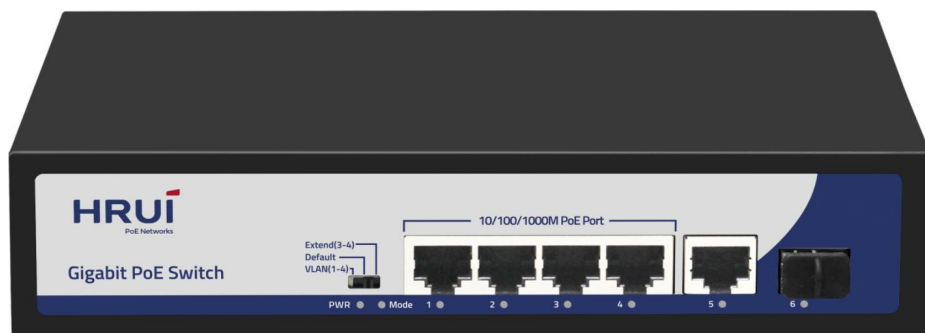

6-port Gigabit PoE switch, using high-quality high-speed network IC and the most stable PoE chip, The PoE port meets the 802.3af or 802.3at standard. This series of PoE switches can provide seamless connection for 10/100/1000M Ethernet, and the PoE power supply port can automatically detect and supply power to powered devices that comply with IEEE802.3af or IEEE802.3at standards, and non-PoE devices intelligently detect no power supply, only data is transferred.

### Main Features

- 4\*10/100/1000M PoE ports +1\*1000M RJ45 Port+1\*1000M SFP Port
- Comply with IEEE 802.3, IEEE 802.3u,IEEE802.3ab, IEEE802.3z standards
- Ethernet port 10/100/1000M rate auto adaptive
- Compatible with IEEE802.3af (15.4w),IEEE802.3at (30W) ;
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard
- Support Port Auto-flip (Auto MDI/MDIX)
- Panel indicators to monitor working status and help fault analysis
- One-key smart switch, supports VLAN,Default , Extend
- Surge Protection: General 4KV; ESD 8KV air, 6KV contact

### Application Environment

#### **Metro Optical Broadband Network:**

Data network operators such as telecommunications, cable TV, and network system integration,etc.

#### **Broadband private network:**

Suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries

#### **Multimedia transmission:**

Integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications

#### **Real-time monitoring:**


Simultaneous transmission of real-time control signals, images and data

Specifications	
<b>I/O Interface</b>	
Power	AC 100-240V, 50/60Hz
Ethernet	4*Gigabit PoE Port 1*Gigabit RJ45 Port 1* Gigabit SFP Uplink Port
<b>Performance</b>	
Switching Capacity	12 Gbps
Forwarding Rate	8.928Mpps
Packet Buffer	1Mbit
MAC Address	2K
Transfer Mode	Store and forward
<b>Standard</b>	
Network protocol	IEEE802.3 IEEE802.3u IEEE802.3ab IEEE802.3z IEEE802.3x
PoE Protocol	IEEE802.3af (15.4W) IEEE802.3at (30W) POE port output voltage: DC 44-57V POE power supply core: 1/2+; 3/6-
Network Medium	10BASE-T: Cat 3、4、5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter) 1000Base-TX : Cat5 or more UTP/STP(≤100 meter)
Optical Media	Multimode fiber : 50/125、62.5/125、100/140um Single mode fiber : 8/125、8.7/125、9/125、10/125um

Environment	
Environment	Working Temperature: -10~50°C Storage Temperature: -40~70°C Working Humidity : 10%~90%, non-condensing Storage Temperature: 5%~95%, non-condensing
Physical Features	
Dimension	Product Dimension : 200*118*44.5mm Package Dimension : 245*190*60mm N.W: 0.65kg G.W: 0.95kg
Packing Info	Carton MEAS: 520*320*400mm Packing Qty: 20 units Packing Weight: 20KG
Power Voltage	Input Voltage : AC 100-240 V Power supply: 52V2.3A
power	Product power: maximum 10W POE power: maximum 110W
Package List	Switch 1 pcs, Power cord 1 pcs, User manual 1 pc, Certification 1 pc
Indicators	
DIP Switch	<p><b>VLAN</b> : Port isolation mode. In this mode, the PoE ports (1-4) of the switch cannot communicate with each other, and can only communicate with the UP-link port.</p> <p><b>Default</b> : Normal mode, all port can communicate with each other, the transmission distance is within 100 meters, the transmission rate is 10M / 100/1000M adaptive;</p> <p><b>Extend</b> : Link extension mode, 3-4 ports PoE power supply and data transmission distance can be extended to 250 meters, the transmission rate becomes 10M</p>
LEDs	PWR (power supply) , Mode (DIP) , 1-6 (Link&Data)

Ordering Info	
HR900-AFG-411NS	6-Port Gigabit PoE Switch

## Front Panel

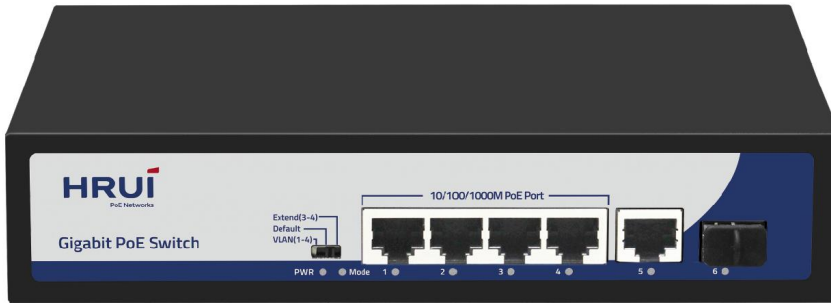

DIP Switch  
Indicator(PWR,Mode,1-6)  
4\* 1000M RJ45 Port (PoE)  
1\* 1000M RJ45 Port  
1\* 1000M SFP Port

PWR  
Lighting: Powered  
Un-Light: No Power

1-6 Link&ACT  
Lighting: Connecting  
Flashing: Data Transmit  
Un-Light: Disconnect

Mode  
Lighting: VLAN  
Un-Light: Default  
Flashing: Extend

## Application

